SOLDIER SYSTEM POWER INTEGRATION AND FIELD EVALUATIONS

Mr. Kailash Shukla
US Army Natick Soldier RD&E Center
Kansas Street, Bldg 5, Room 118
AMSRD-NSR-TP-L
Natick, MA 01760-5000

1. ABSTRACT

The Natick Soldier RD&E Center has been working on maturing and demonstrating advanced concepts and technologies that provide a substantial increase in combat effectiveness for the Small Combat Unit operating in the Future Force Unit of Action. The paper describes the power solutions tested to-date as part of these integrated Soldier systems and also discusses some new power sources planned for demonstration in the next few years.

2. INTRODUCTION

The Natick Soldier RD&E Center (NSRDEC) has been working on maturing, integrating, and demonstrating advanced power solutions for modular, architecture, Soldier/Small Combat Unit (SCU) system of systems that will significantly enhance the combat effectiveness of the SCU operating in the Future Force Unit of Action. The demonstrations are done through participation in major Army-sponsored experimentations, including (a) U.S. Army Communications-Electronics Research, Development and Engineering Center's Control, Communications, (CERDEC) Command, Computers, Intelligence, Surveillance, Reconnaissance (C4ISR) On the Move (OTM) at Fort Dix, N.J., and (b) U.S. Army Training and Doctrine Command's (TRADOC) Air Assault Expeditionary Force (AAEF) Spirals at Fort Benning, Ga. OTM is focused on the technical and engineering aspects of establishing the future force network and making it work in a field environment. AAEF is about exploring how the network enhances operational effectiveness and it also provides the opportunity to experiment with Soldiers in the field to get feedback on Soldier acceptability of the equipment and to gain insights on the tactical utility of the capabilities.

The systems being matured and demonstrated by NSRDEC employ government controlled Modular Open System Architecture (MOSA), focused on current and

future emerging battle command systems, to bring netcentric operations down to the SCU. This relevant situational awareness information at the Soldier level has historically been cumbersome and complicated to obtain. Furthermore, systems developed in the past were customized solutions with proprietary restrictions. Using the open system design allows new technologies and products to be integrated with reduced non-recurring engineering costs. The MOSA approach increases the ability of the contractors, vendors, and government teams to incorporate new technology easily and effectively for the dismounted Soldier and SCU. The SCU uses Soldiersupplemental system components, equipment, sensors, robotics, a distributed information database, and networked communications to execute collective warfighter functions. These systems undergo yearly refinement to ensure the warfighter obtains the right technology by duty position. Optimal distribution of operational capabilities across teams and squads are to maximize small investigated unit mission performance.

3. SYSTEM CONFIGURATIONS TESTED TO-DATE

An example of the leader system configurations tested to-date is shown in Figure 1. It includes a wearable Soldier radio terminal (e.g. WSRT) for communication and networking, body worn antenna (BWA) and headgear, global positioning system (GPS), a processor, goggle mounted display, precision position system or navigation sub system (PPS/NSS), wireless body receiver (WBR), a rechargeable lithium-ion battery (e.g. BB-2590) with smart bus (SMBus) capability, a zinc-air battery or fuel-cell as mission extender power sources, a Power Manager, a multi-function laser (MFL), a weapon wireless input device (WPN WID) and a hub for data/power distribution. The leader system also includes mapping and situational awareness software (e.g. FalconView) and targeting software BareBones) viewed in a goggle-mounted display.

maintaining the data needed, and c including suggestions for reducing	lection of information is estimated to ompleting and reviewing the collect this burden, to Washington Headqu uld be aware that notwithstanding an DMB control number.	ion of information. Send comments arters Services, Directorate for Info	s regarding this burden estimate or properties or street	or any other aspect of the property of the contract of the con	nis collection of information, Highway, Suite 1204, Arlington		
1. REPORT DATE DEC 2008 2. REPORT TYPE N/A				3. DATES COVERED			
4. TITLE AND SUBTITLE					5a. CONTRACT NUMBER		
Soldier System Pov	ver Integration And	5b. GRANT NUMBER					
					5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S)					5d. PROJECT NUMBER		
					5e. TASK NUMBER		
					5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) US Army Natick Soldier RD&E Center Kansas Street, Bldg 5, Room 118 AMSRD-NSR-TP-L Natick, MA 01760-5000 8. PERFORMING ORGANIZATION REPORT NUMBER							
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)					10. SPONSOR/MONITOR'S ACRONYM(S)		
		11. SPONSOR/MONITOR'S REPORT NUMBER(S)					
12. DISTRIBUTION/AVAIL Approved for publ	ABILITY STATEMENT ic release, distributi	on unlimited					
	TES 87. Proceedings of the original documents	•	, ,	Held in Orlai	ndo, Florida on 1-4		
14. ABSTRACT							
15. SUBJECT TERMS							
16. SECURITY CLASSIFIC	17. LIMITATION OF	18. NUMBER	19a. NAME OF				
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified	ABSTRACT SAR	OF PAGES 4	RESPONSIBLE PERSON		

Report Documentation Page

Form Approved OMB No. 0704-0188

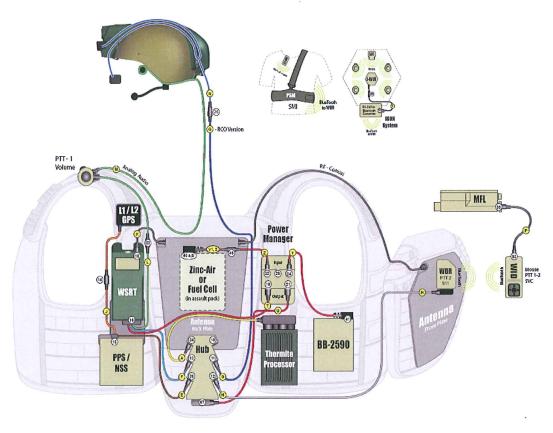


Figure 1. Example of Leader System Configuration

The specific objectives for which the power components were tested are: (1) Compatibility with Soldier equipment - no electromagnetic interference issues, correct interfaces and voltages, and compliance with Smart Management Bus (SM Bus) specifications, (2) Human factors compliance and usability - fits in space available, switches/connectors/LCD screens are accessible, and safety issues resolved, and (3) Reliable operation under various field conditions vibration/shock/dirt/moisture resistant, operate under environmental extremes, and meet performance goals. Some observations from the tests done so far are mentioned here. These include: connector issues with the BB-2590 battery due to complex state-of-charge measurement; the Zinc-air battery showed potential to increase the mission runtime if used in parallel with Liion rechargeable battery, however some of the batteries leaked electrolyte; the direct methanol fuel cell provided the specified power output and showed increase in runtime, however reliability was poor due to electromagnetic interference, pump failure, orientation; and the power manager allowed use of any power source as input power with high conversion efficiency. In addition, all power components including batteries, fuel cell, and power manager were assessed by Soldiers to be too large and heavy.

Another key Soldier system performance metric measured during field experiments related to power and energy was sustainability of power sources which, as specified by the Ground Soldier System (GSS) Capability Development Document (CDD), says that the power source must support autonomous operations for at least 24 hours (ideally 72 hours) without resupply. This metric or requirement, however, is a function of not only the energy content of the power sources but also the energy demand of the power consuming devices, mission activities of the exercise, and the power management techniques employed. Measurement of this sustainment metric was done by collecting data on detailed energy usage and power profiles for multiple Soldier systems tested at OTM and AAEF. As expected, energy usage was affected by duty position, equipment in use, and mission activities of the exercise performed. The leader positions for which energy usage was measured included squad leader, team leader, platoon leader, and platoon sergeant. The peak power consumption for these leader positions was in the range of 50-80 watts. The average power consumption for these leader positions varied from 20-30 watts. The average power consumption for the rifleman position was in the range of 8-10 watts.

4. PATH FORWARD

The new Soldier system power solutions planned for maturation and demonstration during the next four years include: a wearable, conformal, rechargeable battery that mates with body armor both in front and back, as illustrated in Figure 2, and thus frees up real estate on the load bearing chassis; a primary battery with lithium carbon monofluoride chemistry that has twice the energy density of the current BA 5590 battery and thus can



Figure 2. Wearable Conformal Rechargeable battery



Figure 4. Direct and Reformed Methanol fuel cell

provide the same energy in half the size (Figure 3); hybrid power sources based on methanol fuel cells (both direct and reformed methanol types) with 2X reduction in weight or increase in mission time for multi-day missions compared to current rechargeable batteries (Figure 4); and man-portable JP-8 fueled power source for charging batteries closer to the front lines enabling effective tactical use of rechargeable batteries with lightweight and efficient systems (Figure 5). Also planned for demonstration is an "intelligent" energy-management automated controller integrated into the Soldier system that simultaneously manages power sources and sinks to maximize mission duration and combat effectiveness.




Figure 3. Lithium Carbon Monofluoride half-size BA5590 battery




Figure 5. JP-8 Fueled portable power source

REVIEW OF INFORMATION FOR PUBLIC RELEASE									
1. AUTHOR:	PHONE	TEAM/DIR		2. MATERIAL CLASSIFICATION (CHE	ECK ONE):				
Kailash Shukla	5313	TSPID		☐ UNCL ☐ CONF	SECRET				
3. TYPE OF MATERIAL	W∈	4. FUNDING (identify appropriate category):							
☐ Natick Technical Report (1096 Attached)	Со	ntractor Report (1096 Attache	ed)	Direct: 6.3	(e.g., 6.1, 6.2, 6.3, OMA, etc.)				
☐ Briefing/Presentation	Art	icle/Publication		Customer:	(e.g., Marine Corps, Army, Air				
Poster Session	Ab	stract			Force, Other DoD, etc.)				
Other				Other:					
5. TITLE:		6. TYPE OF RELEASE:							
SOLDIER SYSTEM POWER INTEGR.	ATION AN	UNLIMITED DISTRIBUTION: Statement A (Public Release)							
		LIMITED DISTRIBUTION							
_		Reason:							
7. The material 🔀 will 🗌 will not be pro	esented to fo	8. Name and address of periodical (if for journal publication):							
symposium where foreign nationals or foreign r	epresentative								
		Refereed Non-Refereed N/A							
9. FORUM (if appropriate):		10. Attached has not been N/A							
Title: 26th Army Science Conference				coordinated with contractor.					
Location: Orlando, FL		Name and address of contractor:							
Date: 1 Dec 2008 DoD ⊠ YES □ NO									
20	not contain po	12. Portion of attached was was not extracted from							
If it does, please forward to the Office of the Ch	ef Counsel, I	copyrighted source.							
		Source Documentation:							
		Permission granted by:							
		(Correspondence Attached):							
13. APPROVALS/REVIEWS:									
1. Originator/Author: Kailash Shukla		KLA.KAILASH.C.125188928	17 Sep 2008						
Name/Signature/Date									
2. Team OPSEC Officer (Technical OPSEC I		I	RI.A	CKWELL, CYNTHIA, L, 12301219	17.0 2000				
	nia Blackwe e/Signature/D			011,71211,011,11111111111111111111111111	17 Sep 2008				
3. Team Leader/Director:									
	ndy Taylor		TEV	VARDSON, CHERYL, A, 12305437	17 Sep 2008				
Nam 4. Foreign Intelligence and Security Office (F	Name/Signature/Date 4. Foreign Intelligence and Security Office (FISO):								
DD A OVERTE CURENTEN E 10005 (00 P)					17 Sep 2008				
<u></u>	e/Signature/D				17 Sep 2000				
5. Public Affairs Office (Public Release Documents) PAO # 08-428									
Approve Disapprove		I	EL	UCA.JOANN.T.12285234	19 Sep 2008				
	Name/Signature/Date			19 Sep 2008					
14. COMMENTS:									
				,					